

Data sheet

A device for playing outdoors Made based on the standard PN-EN 1176-1:2017-12 Manufactured in Poland

Technical data

| - Device size: | 3,70 x 2,40 m |
|---------------------------|---------------|
| - Total height: | 3,10 m |
| - Impact area dimensions: | 6,70 x 5,70 m |
| - Impact area: | 28,50 m² |
| - Free fall height (HIC): | 1,70 m |
| - Age: | 3+ |





文











Device and impact area dimensions

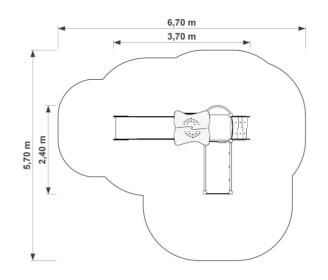

Height

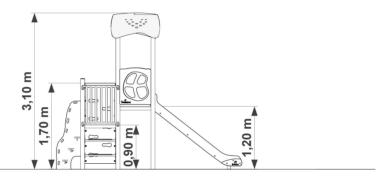

Material specification:

| Construction: | steel profile 80 x 80 mm, galvanized and powder coated |
|-----------------|--|
| Bars / ladders: | pipe 26,9x2,9 mm galvanized and powder coated |
| Slide: | stainless steel |
| Platform: | stainless steel and weatherproof non-slip HDPE |
| Barriers: | weatherproof HDPE |
| Lines: | polypropylene with steel core |
| Connections: | stainless steel |
| Applications: | weatherproof HDPE |
| Wall: | weatherproof HDPE |
| Anchor: | devices permanently anchored in the ground on a concrete foundation of min. C20/25, 60 cm below the ground level |

Impact attenuating surface:

It is required to make one of the impact attenuating surface: Grass Sand -0.2 - 2 mm grain size, depth min. 300 mm, Gravel -2 - 8 mm grain size, depth min. 300 mm, Bark -20 - 80 mm particle size, depth min. 300 mm, Woodchips -5 - 30 mm particle size, depth min. 300 mm, Other materials and other depths as tested according to EN 1177