

## Data sheet

A device for playing outdoors

Made based on the standard PN-EN 1176-1:2017-12

Manufactured in Poland

### Technical data


- Device size:	12,48 x 6,23 m
- Total height:	6,40 m
- Impact area dimensions:	14,98 x 9,73 m
- Impact area:	99,66 m <sup>2</sup>
- Free fall height (HIC):	2,30 m
- Age:	3+




### Set contains:

- platforms at different heights
- three masts with sails
- bow of the ship
- two straight slides
- tube slide
- three inclined rope entrances
- two climbing walls
- entrance ladder
- two rope walls
- oblique entrance gangway
- inclined bridge
- balcony
- tube walkway
- three telescopes
- panels:
- porthole
- two mazes
- pinwheel, window
- tic tac toe
- shop
- compass and weather
- octopus
- rudder
- marine
- two abacuses
- two chalk boards with HPL
- thematic applications

### Device and impact area dimensions

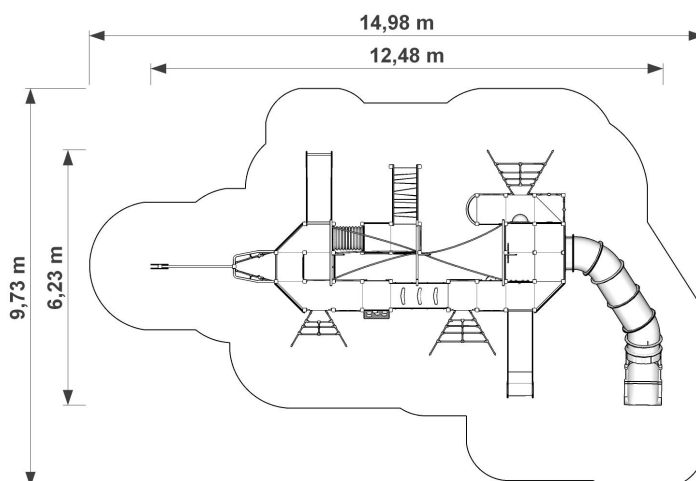

### Height

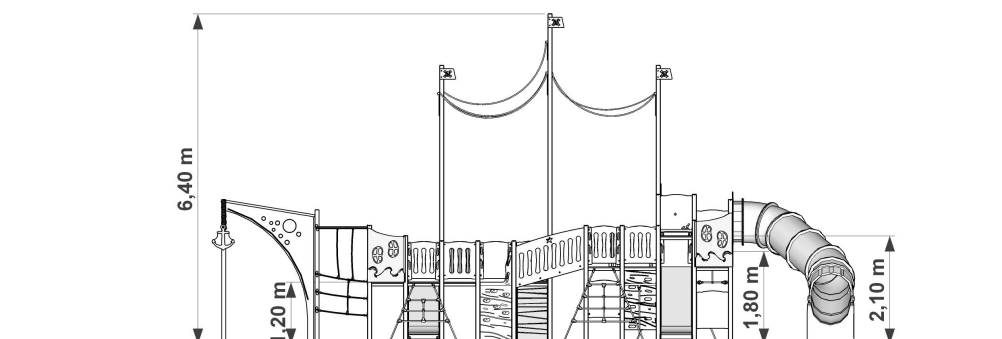

### Material specification:

Construction:	steel profile 80 x 80 mm, galvanized and powder coated
Bars / ladders:	pipe 26,9x2,9 mm galvanized and powder coated
Slide:	stainless steel
Platform:	stainless steel and weatherproof non-slip HDPE
Barriers:	weatherproof HDPE
Roof:	weatherproof HDPE
Lines:	polypropylene with steel core
Connections:	stainless steel
Tube:	polypropylene
Applications:	weatherproof HDPE
Wall:	weatherproof HDPE
Anchor:	devices permanently anchored in the ground on a concrete foundation of min. C20/25, 60 cm below the ground level

### Impact attenuating surface:

It is required to make one of the impact attenuating surface:  
 Sand – 0,2 - 2 mm grain size, depth min. 400 mm,  
 Gravel – 2 - 8 mm grain size, depth min. 400 mm,  
 Bark – 20 - 80 mm particle size, depth min. 400 mm,  
 Woodchips – 5 - 30 mm particle size, depth min. 400 mm,  
 Other materials and other depths as tested according to EN 1179

