

**Data sheet**

A device for playing outdoors  
 Made based on the standard  
 PN-EN 1176-1:2017-12

Manufactured in Poland

**Technical data**

- Device size:	9,07 x 5,28 m
- Total height:	2,74 m
- Impact area dimensions:	13,07 x 8,28 m
- Impact area:	74,84 m <sup>2</sup>
- Free fall height (HIC):	0,90 m
- Age:	3+



**Set contains:**


three towers with a roof  
 three towers without a roof  
 two slides  
 inclined rope ascent  
 fireman's tube

two rope bridges  
 bridge  
 rope passage with steps  
 tube  
 window panel


tic-toe panel  
 inclined climbing ascent  
 vertical climbing ascent



**Device and impact area dimensions**

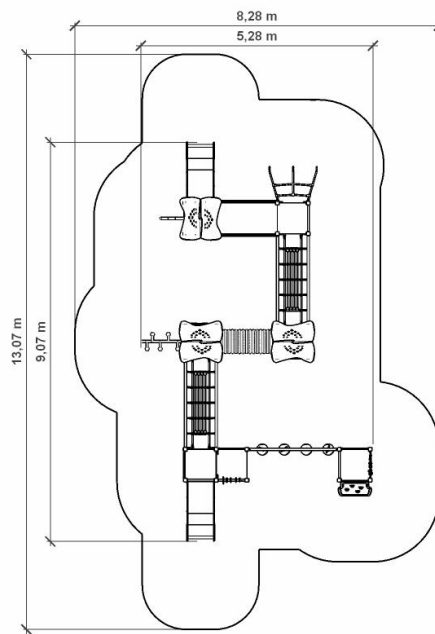

**Height**

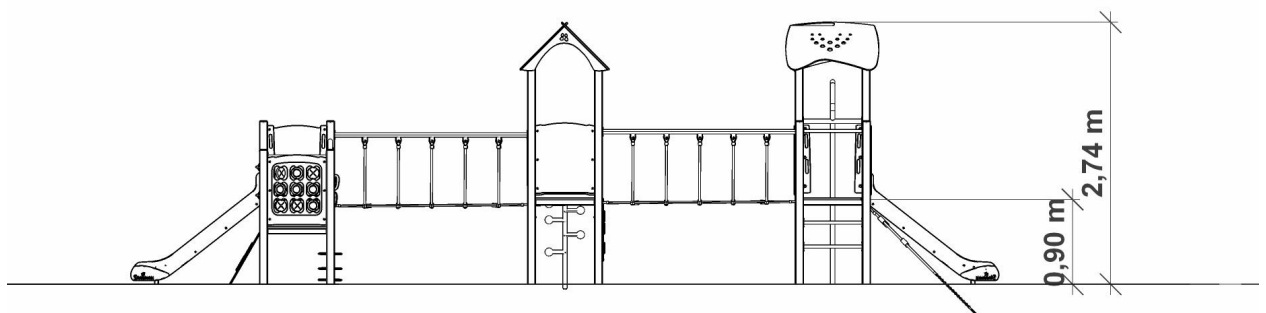

**Material specification:**

Construction:	steel profile 80 x 80 mm, galvanized and powder coated
Bars / ladders:	pipe 26,9 mm galvanized and powder coated
Slide:	stainless steel
Platform:	stainless steel and weatherproof non-slip HDPE
Barriers:	weatherproof HDPE
Roof:	weatherproof HDPE
Lines:	polypropylene with steel core
Connections:	stainless steel
Fireman's pole:	stainless steel
Tube:	polypropylene
Applications:	weatherproof HDPE
Anchor:	devices permanently anchored in the ground on a concrete foundation of min. C20/25, 60 cm below the ground level

**Impact attenuating surface:**

It is required to make one of the impact attenuating surface:

- Grass
- Sand – 0,2 - 2 mm grain size, depth min. 300 mm,
- Gravel – 2 - 8 mm grain size, depth min. 300 mm,
- Bark – 20 - 80 mm particle size, depth min. 300 mm,
- Woodchips – 5 - 30 mm particle size, depth min. 300 mm,
- Other materials and other depths as tested according to EN 1180

