

P3025 - Bujak z grą 4-osobowy



Data sheet

A device for playing outdoors

Made based on the standard PN-EN 1176-1:2017-12

Manufactured in Poland

Technical data

- Device size:

- Total height:

- Impact area dimensions:

- Impact area:

- Impact area:

- Free fall height (HIC):

- Age:

1,80 x 1,80 m

5,81 x 5,11 m

5,11 x 5,11 m

20,50 m²

0,55 m







P3025 - Bujak z grą 4-osobowy



Device and impact area dimensions



Height

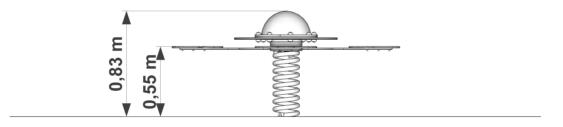

Material specification:

Construction: certified spring, powder coated

Connections: stainless steel

Seat: weatherproof HDPE Applications: weatherproof HDPE

Anchor: devices permanently anchored in the ground on a concrete foundation of

min. C20/25, 35 cm below the ground level

Impact attenuating surface:

It is required to make one of the impact attenuating surface:

Grass

Sand – 0,2 - 2 mm grain size, depth min. 200 mm,

Gravel – 2 - 8 mm grain size, depth min. 200 mm,

Bark – 20 - 80 mm particle size, depth min. 200 mm,

Woodchips – 5 - 30 mm particle size, depth min. 200 mm,

Other materials and other depths as tested according to EN 1177