

Product information:

| | |
|-------------------------------|----------------------|
| Product length: | 4,43 m |
| Product width: | 1,81 m |
| Product height: | 2,94 m |
| Product weight: | - kg |
| Execution standard: | PN-EN 1176-1:2017-12 |
| Safety zone area: | 29,50 m ² |
| HIC (Free fall height): | 0,90 m |
| Suitable for inclusive users: | NO |
| Customisable colours: | YES |
| Maximum user weight: | 130 kg |
| Suggested user age: | ≤3 years |
| Suggested user height: | ≤ 140 cm |
| Estimated lead time: | 4 - 6 weeks |




Material specification:

Main construction: Metal
 HDPE Parts: (≤ 6 mm)
 Footsteps: -
 Zinc primer: YES
 Painting: 2x layers of powder paint
 Screws and nuts: Stainless steel
 Montage method: -30 cm
 Standard colours: grey, yellow, blue

Suggested safety surface:

It is necessary to construct any below safety surface to cushion falls:

- 1) Grass
- 2) Sand – fraction 0,2 to 2 mm, minimum thickness 200 mm
- 3) Gravel – fraction 2 to 8 mm, minimum thickness 200 mm
- 4) Bark – fraction 20 to 80 mm, minimum thickness 200 mm
- 5) Wood chips – fraction 5 to 30 mm, minimum thickness 200 mm
- 6) Synthetic surfaces made in compliance with the PN-EN 1177:2017 standard

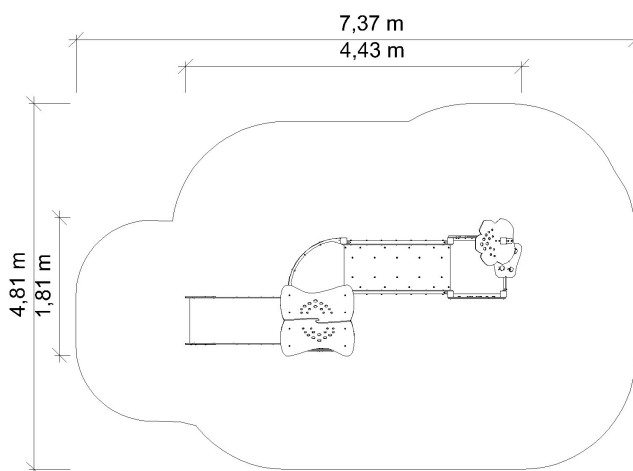

Additional information:

Product colours can be adjusted
 Montge method can be adjusted
 Material of seats and footsteps can be adjusted
 Information sticker can be adjusted

Contact number: +48 730 293 393; +48 600 250 245

E-mail: info@starmax.com.pl

Factory: Poland, 83-050 Bakowo, Rycerska 3 St.

Manufacturer: Starmax Marek Starczewski

Made in Poland

