

P5070 - Convex bridge

Data sheet

A device for playing outdoors Made based on the standard PN-EN 1176-1:2017-12

Manufactured in Poland

Technical data

- Device size:	4,16 x 1,08 m
- Total height:	1,81 m
- Impact area dimensions:	7,16 x 4,08 m
- Impact area:	27,28 m²
- Free fall height (HIC):	0,59 m
- Age:	7+



Available colors













Device and impact area dimensions

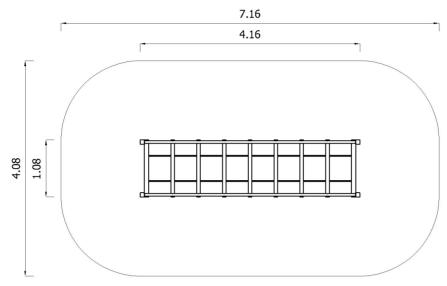

Height



Material specification:

Construction: Bars / ladders: Platform: Lines: Connections: Anchor: steel profile 80 x 80 mm and 40 x 40 mm, galvanized and powder coated steel profile 100 x 50 mm, galvanized and powder coated wood profile 80 x 80 and 70 x 70 mm polypropylene with steel core stainless steel devices permanently anchored in the ground on a concrete foundation of min. C20/25, 60 cm below the ground level

Impact attenuating surface:

It is required to make one of the impact attenuating surface: Sand -0,2 - 2 mm grain size, depth min. 300 mm, Gravel -2 - 8 mm grain size, depth min. 300 mm, Bark -20 - 80 mm particle size, depth min. 300 mm, Woodchips -5 - 30 mm particle size, depth min. 300 mm, Other materials and other depths as tested according to EN 1179

