



Data sheet

A device for playing outdoors

Made based on the standard PN-EN 1176-1:2017-12

Manufactured in Poland

Technical data

- Device size: 6,00 x 3,97 m

- Total height: 3,50 m

- Impact area dimensions: 9,00 x 7,47 m

1+

- Impact area: 48,66 m²

- Free fall height (HIC): 1,50 m

- Age:






Available colors








Device and impact area dimensions

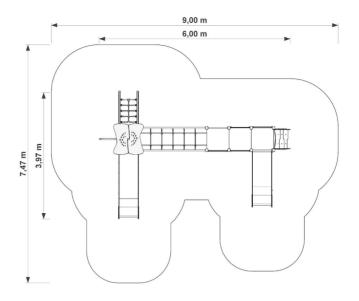

Height

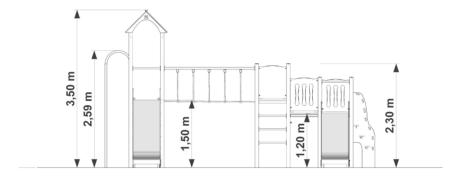

Material specification:

Construction: steel profile 80 x 80 mm, galvanized and powder coated

Bars / ladders: pipe 26,9x2,9 mm galvanized and powder coated

Slide: stainless steel

Platform: stainless steel and weatherproof non-slip HDPE

Barriers: weatherproof HDPE Roof: weatherproof HDPE

Lines: polypropylene with steel core

Connections: stainless steel Fireman's pole: stainless steel

Anchor: devices permanently anchored in the ground on a concrete foundation of

min. C20/25, 60 cm below the ground level

Impact attenuating surface:

It is required to make one of the impact attenuating surface:

Sand – 0,2 - 2 mm grain size, depth min. 200 mm,

Gravel – 2 - 8 mm grain size, depth min. 200 mm,

Bark – 20 - 80 mm particle size, depth min. 200 mm,

Woodchips – 5 - 30 mm particle size, depth min. 200 mm,

Other materials and other depths as tested according to EN 1177