



Data sheet

A device for playing outdoors

Made based on the standard PN-EN 1176-1:2017-12

Manufactured in Poland

Technical data

- Device size: 4,83 x 3,99 m

- Total height: 3,33 m

- Impact area dimensions: 8,33 x 6,94 m

3+

- Impact area: 40,34 m²

- Free fall height (HIC): 1,50 m

- Age:













Device and impact area dimensions

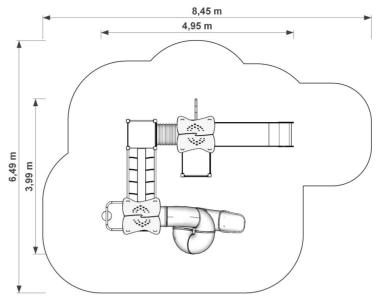

Height

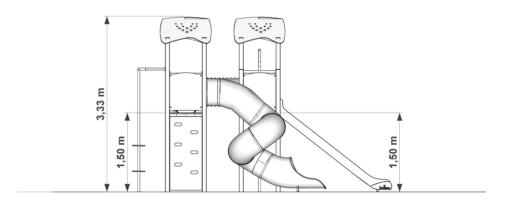

Material specification:

Construction: steel profile 80 x 80 mm, galvanized and powder coated

Bars / ladders: pipe 26,9x2,9 mm galvanized and powder coated

Slide: stainless steel/polypropylene

Platform: stainless steel and weatherproof non-slip HDPE

Barriers: weatherproof HDPE Roof: weatherproof HDPE

Connections: stainless steel Fireman's pole: stainless steel Tube: polypropylene

Anchor: devices permanently anchored in the ground on a concrete foundation of

weatherproof HDPE

min. C20/25, 60 cm below the ground level

Impact attenuating surface:

It is required to make one of the impact attenuating surface:

Grass

Applications:

Sand – 0,2 - 2 mm grain size, depth min. 300 mm,

Gravel – 2 - 8 mm grain size, depth min. 300 mm,

Bark – 20 - 80 mm particle size, depth min. 300 mm,

Woodchips – 5 - 30 mm particle size, depth min. 300 mm,

Other materials and other depths as tested according to EN 1179