

Data sheet

A device for playing outdoors

Made based on the standard

PN-EN 1176-1:2017-12

Manufactured in Poland

Technical data

- Device size:	4,16 x 3,06 m
- Total height:	2,00 m
- Impact area dimensions:	7,13 x 6,06 m
- Impact area:	33,44 m ²
- Free fall height (HIC):	1,20 m
- Age:	3+
- Number of users	10




Set contains:

two platforms at different heights
two slides


inclined rope entrance
climbing wall

tic-tac-toe panel
hurdle panel

Device and impact area dimensions

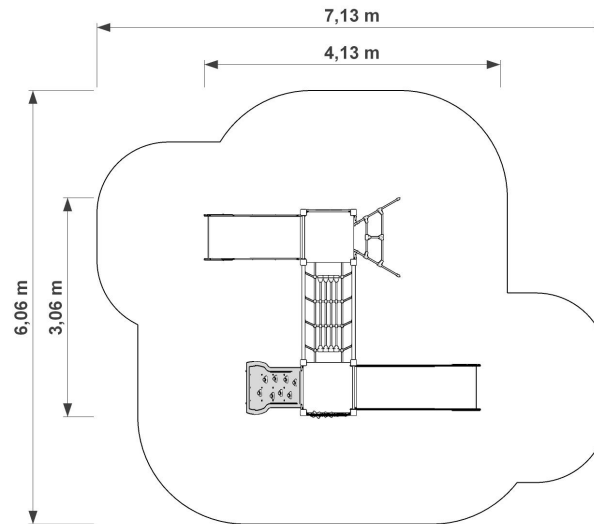

Height

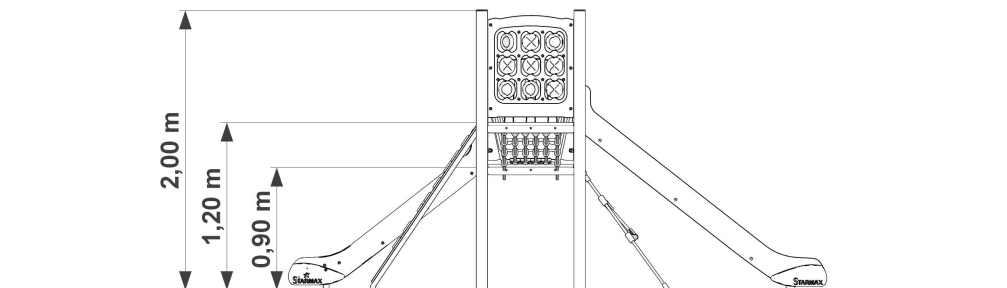

Material specification:

Construction:	steel profile 80 x 80 mm, galvanized and powder coated
Bars / ladders:	26.9 mm pipe, galvanized and powder coated
Slide:	stainless steel
Platform:	stainless steel and weatherproof non-slip HDPE
Barriers:	weatherproof HDPE
Lines:	polypropylene with a steel core
Connections:	stainless steel
Applications:	weatherproof HDPE
Wall:	weatherproof HDPE
Anchor:	devices permanently anchored in the ground on a concrete foundation of min. C20/25, 60 cm below the ground level

Impact attenuating surface:

It is required to make one of the impact attenuating surface:

Grass

Sand – 0,2 - 2 mm grain size, depth min. 300 mm,

Gravel – 2 - 8 mm grain size, depth min. 300 mm,

Bark – 20 - 80 mm particle size, depth min. 300 mm,

Woodchips – 5 - 30 mm particle size, depth min. 300 mm,

Other materials and other depths as tested according to EN 1179

