



Data sheet

A device for playing outdoors

Made based on the standard PN-EN 1176-1:2017-12

Manufactured in Poland

Technical data

- Device size: 9,50 x 5,77 m

- Total height: 5,00 m

- Impact area dimensions: 12,94 x 9,21 m

- Impact area: 71,94 m²

2,00 m - Free fall height (HIC):

- Age:











Device and impact area dimensions

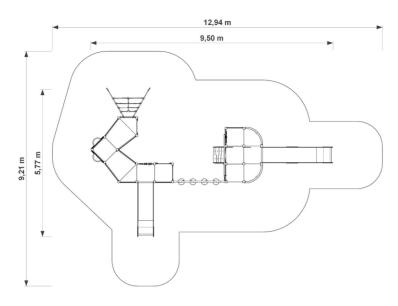



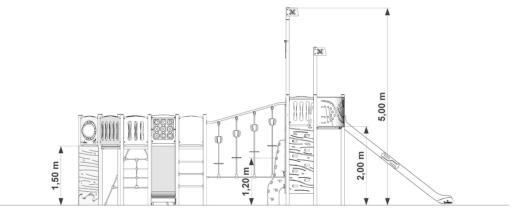

Material specification:

Construction: steel profile 80 x 80 mm, galvanized and powder coated

Bars / ladders: pipe 26,9x2,9 mm galvanized and powder coated

Slide: stainless steel

Platform: stainless steel and weatherproof non-slip HDPE

Barriers: weatherproof HDPE

Lines: polypropylene with steel core

Connections: stainless steel

Applications: weatherproof HDPE Wall: weatherproof HDPE

Anchor: devices permanently anchored in the ground on a concrete foundation of

min. C20/25, 60 cm below the ground level

Impact attenuating surface:

It is required to make one of the impact attenuating surface:

Grass

Sand – 0,2 - 2 mm grain size, depth min. 300 mm,

Gravel – 2 - 8 mm grain size, depth min. 200 mm,

Bark – 20 - 80 mm particle size, depth min. 200 mm,

Woodchips – 5 - 30 mm particle size, depth min. 200 mm,

Other materials and other depths as tested according to EN 1177